
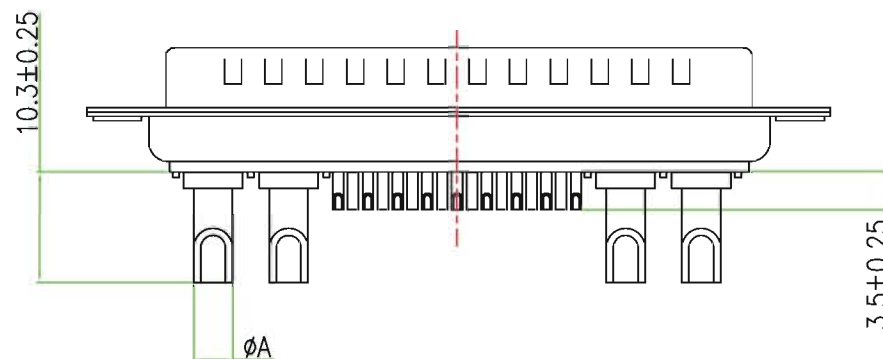



“*” Pivot Dimension

RoHS Component

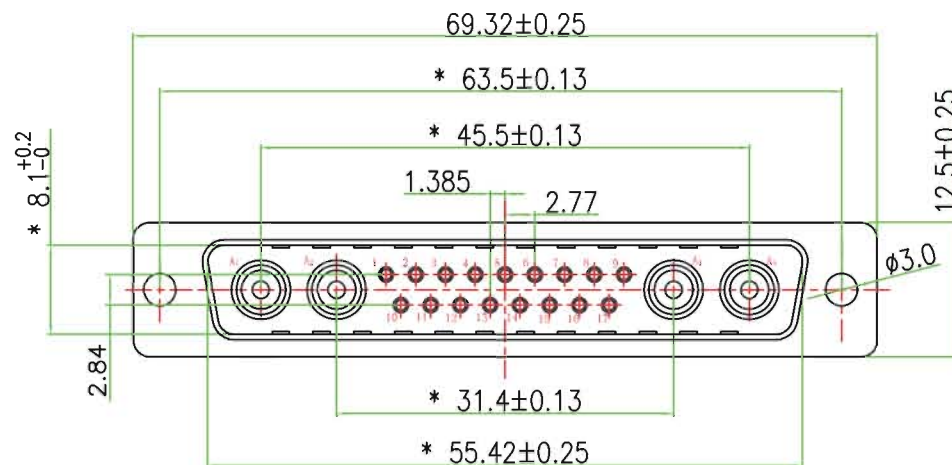

MATERIALS AND FINISH

SHELL : STEEL OR BRASS MATERIAL, Tin/Ni OR Au FINISHED

CONNECTOR INSULATOR : PBT THERMOPLASTIC,30% GLASS FILLED, UL 94V-0 RATED

CONNECTOR WITH SIGNAL CONTACT MATERIAL: BRASS, 1U~30u" GOLD PLATED

HIGH POWER CONTACT MATERIAL: BRASS, 3U~50u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,30,OR 40 AMPS

HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.

CONNECTOR WITH SIGNAL CONTACT RESISTANCE: 10 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C ~ +125°C

PO(X)	A	B	WIRE	CURR RATING(A)
1	2.5	4.5	1/16"10#	10
2	3.6	5.0	1/16"12#	20
3	4.4	5.5	1/16"10#	30
4	5.5	5.5	1/16"12#	40

ADAMICU® 东莞市亚当电子科技有限公司 Adam Electronic Technology Co.,Ltd			
TOLERANCE: X. ±0.38 XX ±0.25 XXX ±0.13 X* ±3° XX* ±1° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY :	DATE :	PART NAME:
	杨冬梅	2009.09.17	21W4 FEMALE SOLDER TYPE
	CHECKED BY:	DATE :	DRAW NO.
	杨冬梅	2011.05.26	YMP4402
APPROVED BY:	胡超	DATE : 2011.06.26	PART NO.
			P21W4MB00X00
			REMARK
			MOLD NO.